

Door

Standard

Single glazed




Rw up to 40 dB



Option to add
muntins




Smoke-proof
option

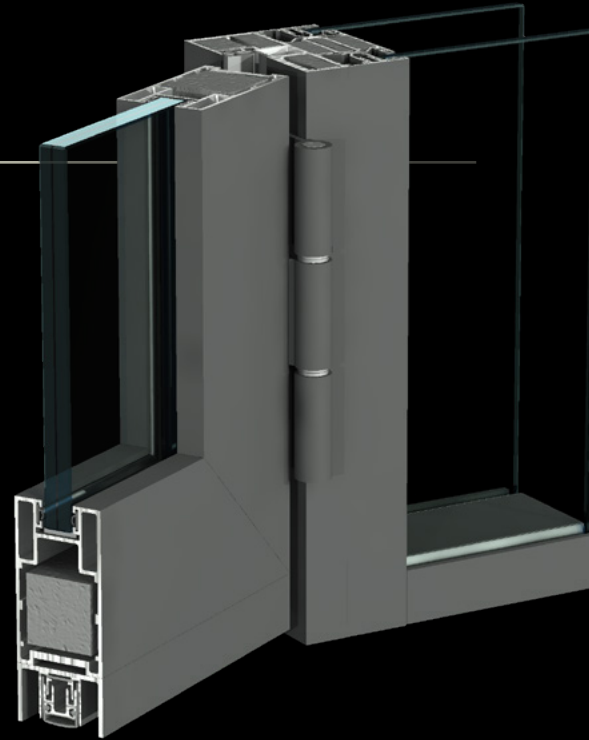

Our STANDARD aluminium-framed doors can be installed in any mounting hole, including glass wall systems. With sound insulation of Rw 34 dB to Rw 40 dB and the option of retrofitting decorative or structural muntins, they are a popular choice for various modern office interior designs.


We also offer a smoke-proof version of our STANDARD doors.



Single or double
leaf doors

Standard door

Horizontal

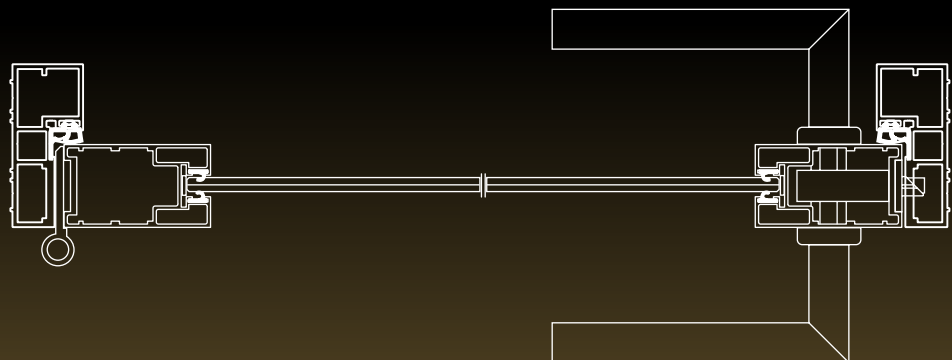

Glazing	VSG 44.2	VSG 55.1	VSG 66.2Si	VSG 66.2Si + Acoustic insert	Double Leaf Doors	VSG 66.2Si
Acoustic insulation Rw	34 dB	35 dB	37 dB	40 dB		36 dB